





## Incredible stability with any type of target

Integration of digital technology and ultrasonic waves  
has produced super multi-reflective type sensors.



# All-purpose digital sensor

Introducing the FW Series, a tough, super multi-reflective sensor unaffected by a target's material, color, or luster.

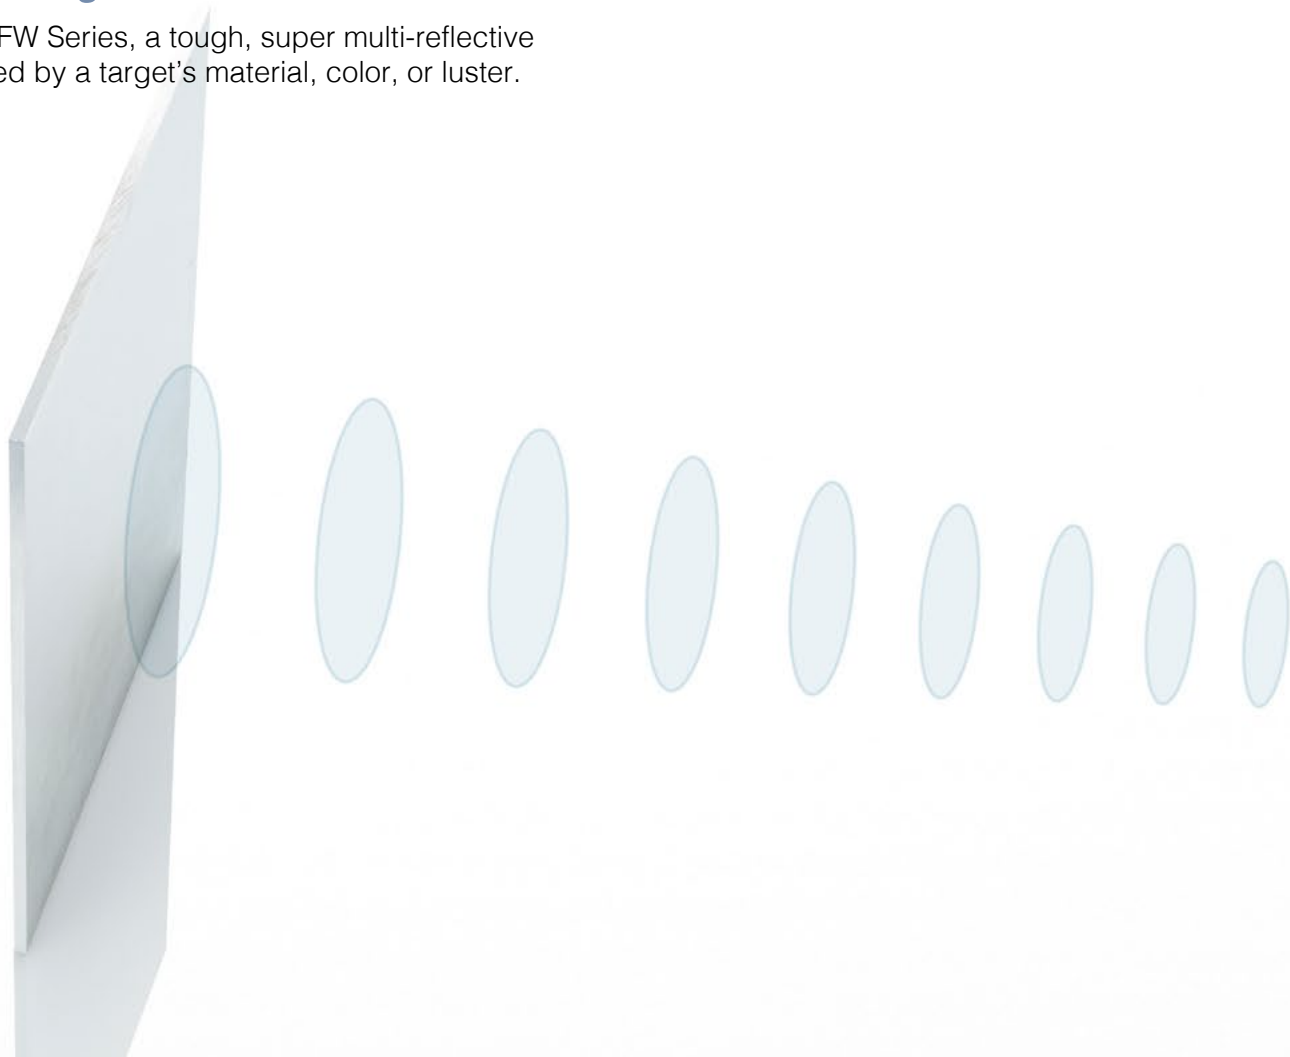

Reasons for  
its strength

1

## Can be used for all types of targets

The FW Series easily detects metal, glass, liquid level or other targets that have been difficult to detect with reflective-type photoelectric sensors. Also, the detections are not influenced by the color, pattern, or luster of the target surface.



Reasons for  
its strength

2

## High stability and reliability

### First in the industry

A new algorithm A.W.S. (Active Wave Stabilizer)\* stabilizes detection while avoiding the influence of target vibration or external disturbances.



\* The A.W.S. (Active Wave Stabilizer) function executes optimal processing according to the detecting condition and cancels fluctuations even when the receiving condition of the ultrasonic wave changes due to target vibration.




**The long-range model features  
a maximum detecting distance of 39.37" (1,000 mm)!**



FW-H10R: 39.37" (1,000 mm)  
FW-H07: 27.56" (700 mm)  
FW-H02: 7.87" (200 mm)



Digital amplifier  
**FW-V20**

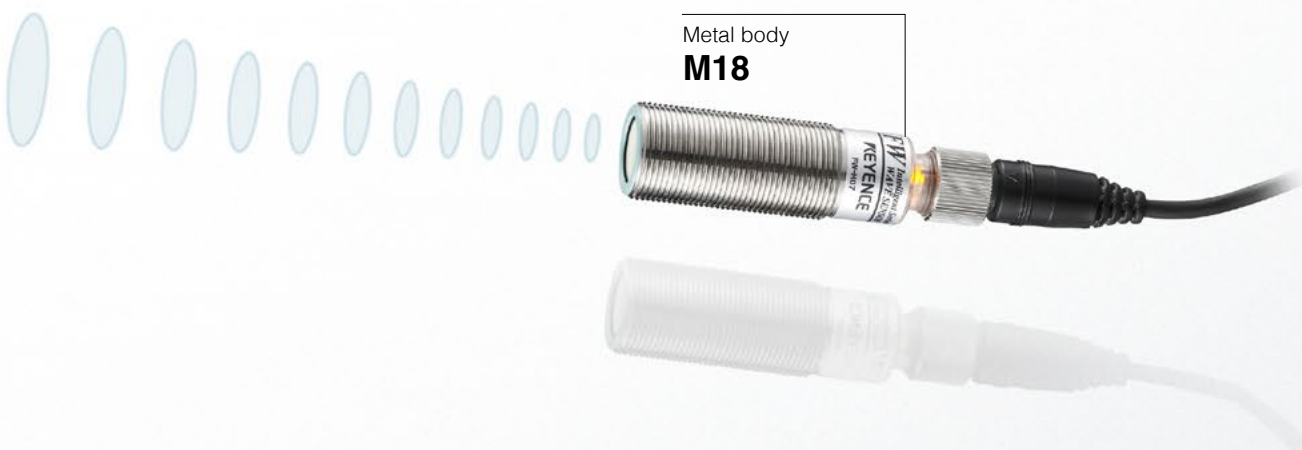


Reasons for  
its strength

**3**

## Resistant to mist and dirt

The intense ultrasonic wave penetrates dust and dirt and detects the target. Also, the sensor body is IP67 rated and has excellent environmental resistance.

The easily detachable connector is also IP67 rated.

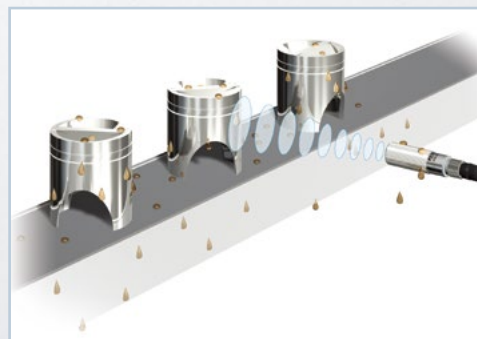


Reasons for  
its strength

**4**

## Unaffected by the background

The N.O.D. (Nearest Object Detection) function, which detects only the target located nearest to the sensor, eliminates the need to consider the background clutter or shape. Reliable detection is ensured without taking measures such as tilting the sensor or changing the color of the background.

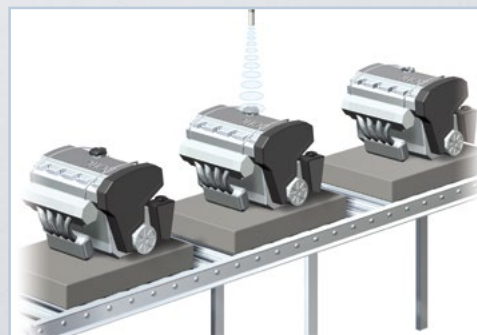

# Versatile performance with user-friendly operation

## Dual Digital Display

The digital indicator displays the distance in an easy-to-understand numerical display.


## Easy set up with one-button operation

The settings can be configured by simply pressing the [SET] button with or without the target in place.



## Target Height Display **First in the industry**

This function is convenient for differentiating target heights or for detecting liquid levels. The height of the target or liquid level can be displayed numerically to allow the user to determine the preset value, which makes for an easy-to-understand sensor for any user. The FW Series is the clear choice over conventional reflective sensors which feature unitless numerical displays, or LED bar indicators.

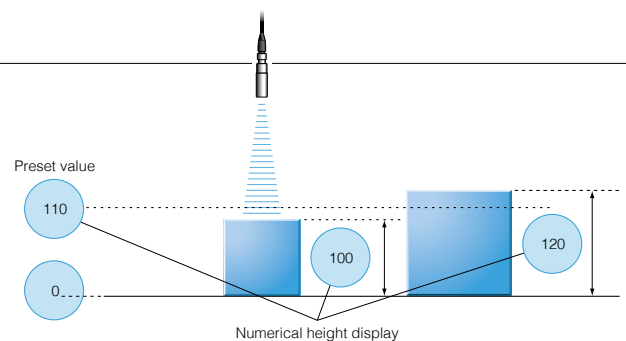


## Convenient sensitivity adjustment method

### 1-point zone tuning

**F-2** **First in its class**


This function is useful for detection with a background. Pressing the [SET] button once will enable detection of only a target with a certain height without detecting the background.



### Conveyor tuning

**A-1** **First in its class**

A preset value is tuned automatically to a level unaffected by background vibrations (conveyor, etc.).

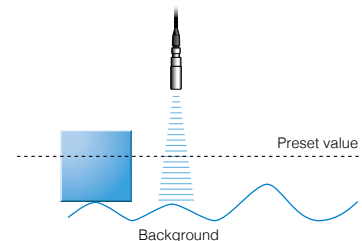

## Chatter prevention function and display averaging mode

**F-1** **F-2** **A-1** **A-2** **A-3**

The chatter prevention function prevents the outputs from chattering. This is possible by delaying the response time when the liquid surface ripples in liquid level detections. In addition, selecting the display averaging mode will reduce fluctuations of the display.

## Power-saving function

**F-1** **F-2** **A-1** **A-2** **A-3**

With this function, the display can be simplified when the sensor is not being operated. Power consumption can be reduced by approximately 20% <sup>1</sup>.

## External shift function <sup>2</sup> **F-1** **First in its class**

This function is effective for severe environments with slight sensitivity differences. When the displayed values fluctuate due to variations in temperature or background position, the displayed value can be compensated by an external shift input immediately before detection.

## Bank switching function <sup>2</sup> **F-1** **F-2** **A-3**

Detection of up to four types of targets is enabled by entering a bank-switching input externally.

## Analog monitor output <sup>2</sup>

**F-1** **F-2** **A-1** **A-2** **A-3**

The FW Series features an analog output (4 to 20 mA).


## Panel-mount amplifier option

The lineup includes a panel-mount type that fully utilizes the viewer-friendly display. The compact amplifier enables contact mounting of the unit.

The FW Series supports panel mounting. Contact mounting is also available for space-saving installations when using two or more units.



## Choose from 5 different detection modes for your application





### F-1 mode (General purpose)

Various sensitivity adjustments are available. For example, "two-point tuning" can be performed by pressing the [SET] button with or without the target in place, and "full-automatic tuning" can be performed automatically while the operator moves the target.




### F-2 mode (Detecting a target with a background)

This mode is useful when detecting a target with a background. The target height is displayed with the background as the reference. "One-point zone tuning" is available, which detects only targets at a certain height without detecting the background.

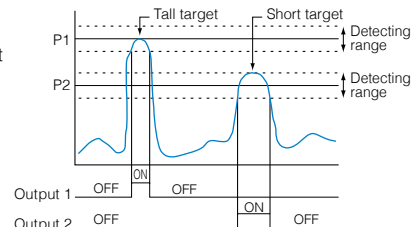

### A-1 mode (Detecting a target on a conveyor)

This mode is optimal for detecting the presence and absence of targets traveling on a conveyor. The target height is displayed with the conveyor as the reference. "Conveyor tuning" is available, which detects only the targets without detecting the vibrations of the conveyor. Output 2 serves as the alarm signal that detects unloading of the conveyor and other abnormalities.

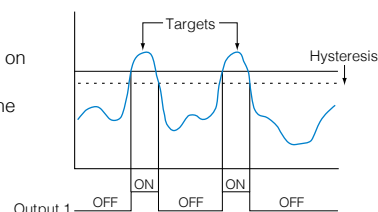

### A-2 mode (Detecting the liquid level)


This mode is suitable for detecting the liquid level. The height of the liquid level is displayed with the bottom of the tank as the reference. Two preset values (upper and lower limits) and two additional preset values for predicting the upper and lower values can be set up to enable monitoring the following four statuses: normal, near the upper limit, near the lower limit, and abnormality of upper and lower limits.

|                                | Output 1 | Output 2 |
|--------------------------------|----------|----------|
| P1 (upper limit)               | OFF      | OFF      |
| P2 (prediction of upper limit) | ON       | OFF      |
| P3 (prediction of lower limit) | ON       | ON       |
| P4 (lower limit)               | OFF      | ON       |
|                                | OFF      | OFF      |




### A-3 mode (Zone control)

This mode is suitable for controlling the pump by detecting the liquid level in a tank, or for controlling the tension of sheet material. The height of the liquid level or the sheet can be displayed by setting the reference level as desired. Two preset values (upper and lower limits) can be set up to control the device: When the upper limit is exceeded, the output is turned off to stop the device, and when the lower limit is exceeded, the output is turned on to activate the device.




# Wide range of applications

## Automotive Industry

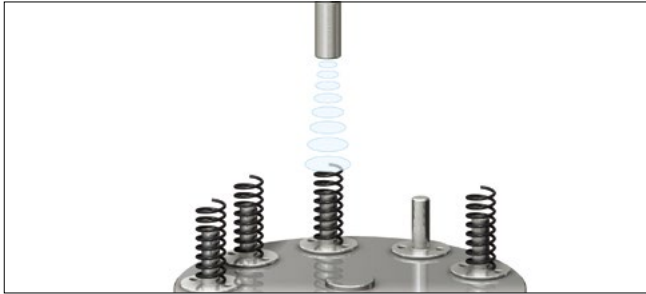


### Detecting springs during the assembly process

Due to an unstable profile, detection of springs has been unreliable with conventional reflective photoelectric sensors. The FW Series ensures reliable detection without being influenced by background luster.

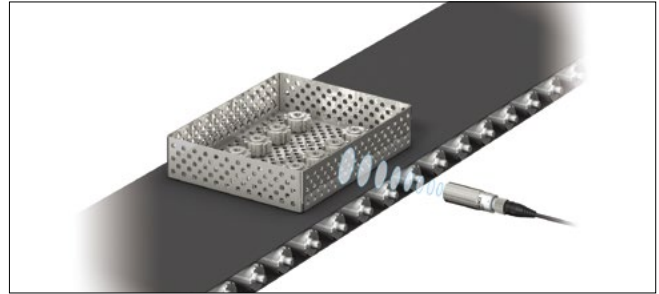


### Detecting mesh trays used for quenching the targets

The FW Series ensures reliable detection of targets with metallic luster and small holes. In addition, detection is unaffected by workpieces located on the opposite side of the holes.

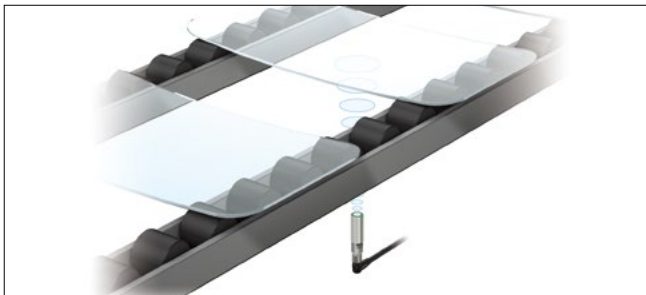


### Detecting automotive plate glass

Reliable detection of transparent targets has been difficult with conventional reflective photoelectric sensors. The FW Series ensures reliable detection of transparent targets without being affected by the glass colors.

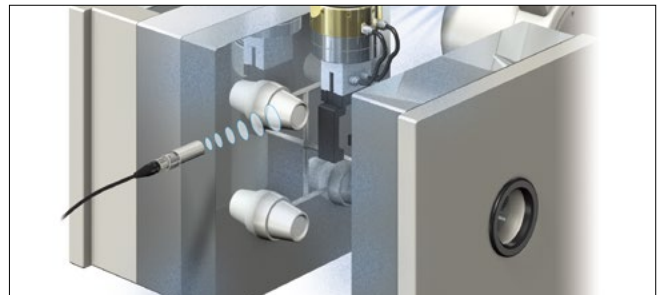

### Checking target removal from a die-cast machine

The FW Series ensures reliable detection of multi-colored targets without being affected by the colors. In addition, detection is unaffected by mold release agents in the environment.

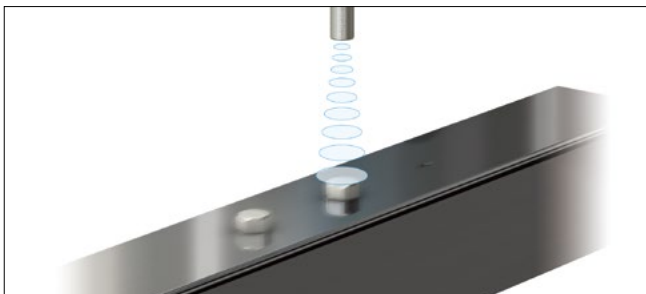


### Checking the presence/absence of bolts

The FW Series is used to detect metal targets on metal boards. Detecting only the presence of bolts is possible without being affected by the luster of the metal.



### Detecting con-rods

Due to the coolant on the target surface, reliable detection of an atomized area has been difficult with conventional reflective photoelectric sensors. The FW Series ensures reliable detection unaffected by the coolant on the target surface.

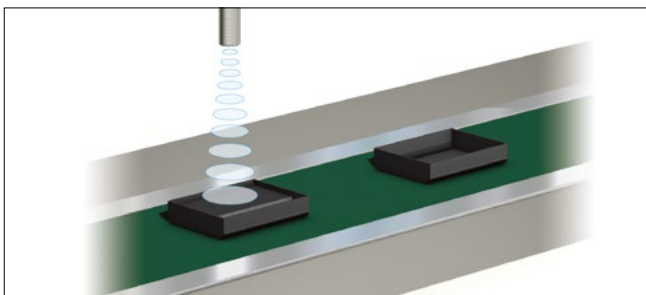


### Detecting black-colored cushioning material on black resin

Detection of black-colored targets has been difficult with conventional reflective photoelectric sensors. The FW Series ensures reliable height differentiation without being affected by color.




### Detecting the liquid level of hydraulic fluid for a press

Dirty oil has been difficult to detect with conventional contact liquid level sensors. The FW Series enables non-contact detection reducing the need for costly maintenance services.

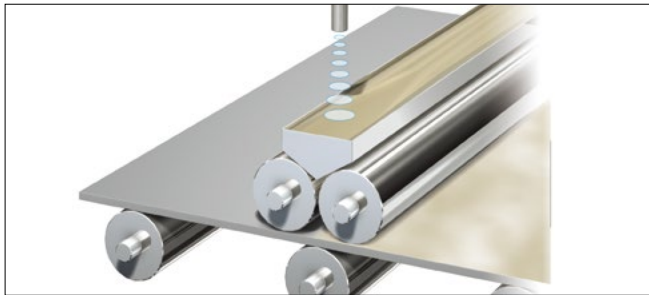

### Detecting the fluid level of adhesive on a roll coater

Detection of adhesive with high viscosity has been difficult with conventional contact liquid level sensors. The FW Series enables non-contact detection. In addition, outputs of upper and lower limits can be performed separately.

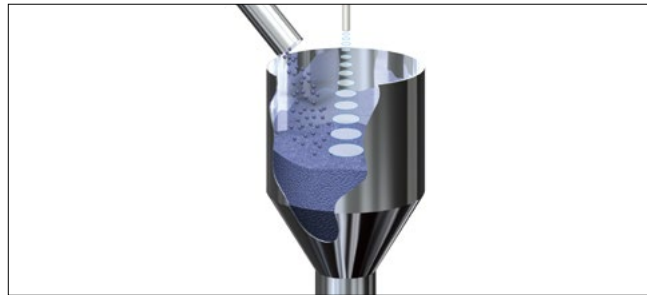


### Detecting remaining pellet quantity in a hopper

Due to shape and color variations of pellets, detection has been unstable with conventional reflective photoelectric sensors. The FW Series ensures reliable detection regardless of pellet color or shape.




## Food, Chemical, and Cosmetics Industries

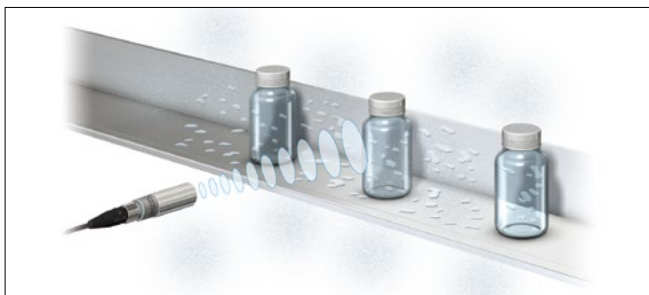


### Detecting transparent bottles in the cleaning process

The FW Series ensures reliable detection of transparent targets with a rounded shape. In addition, detection is unaffected by an environment where water splashes on the target surface.

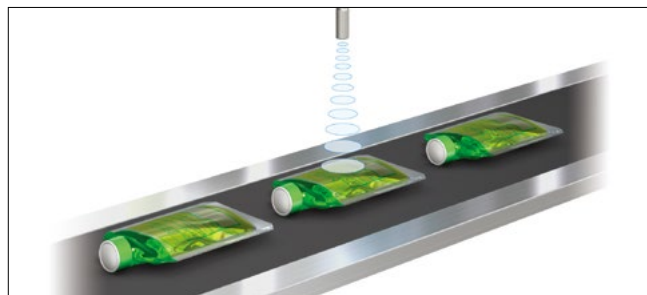


### Detecting vinyl packages on a conveyor

Due to the transparency of the target and the unstable surface profile, detection has been difficult with photoelectric sensors. The FW Series can reliably detect targets with a rippled surface profile.

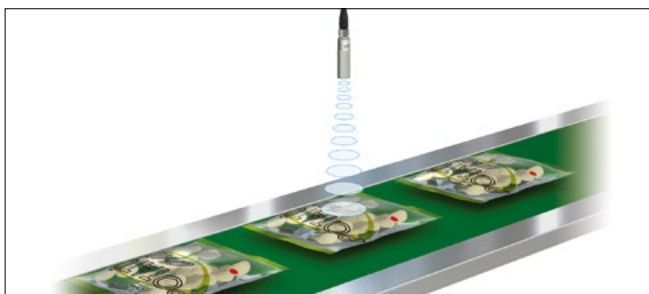


### Detecting confectionery packaging on a conveyor

Depending on the condition of the contents, stable detection of transparent confectionery packaging has been difficult with conventional photoelectric sensors. The FW Series reliably detects only the outside transparent package without being affected by the contents.

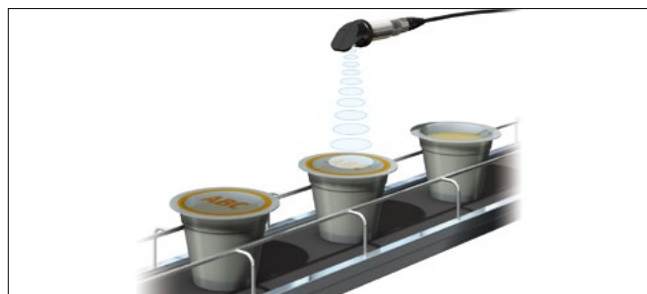


### Detecting transparent lids of containers

The FW Series ensures reliable detection even if the target surface is rippled. In addition, detection is not affected by the inner contents when covered with a transparent lid.

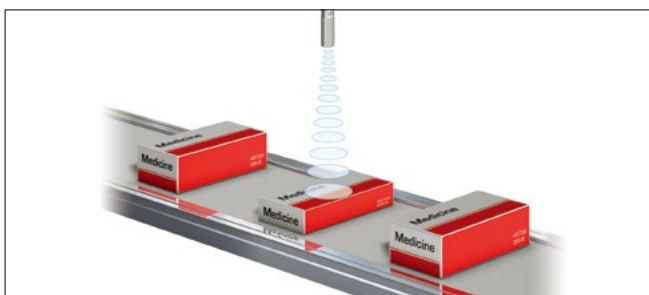


### Differentiating the presence / absence of product packaging and product varieties

The FW Series is capable of differentiating only the height without being affected by the color or pattern of the targets. In addition, it is capable of differentiating product variety by using two outputs.

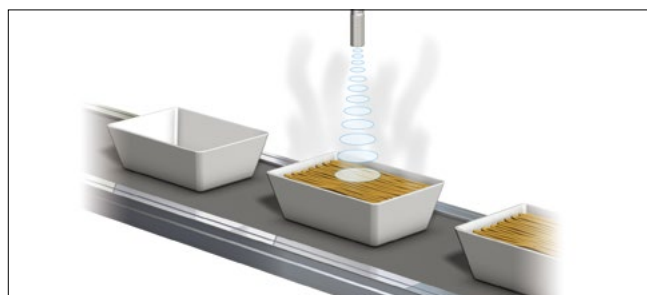

### Detecting the presence / absence of contents in containers

Pasta or targets with an uneven surface profile can be detected reliably. In addition, detection is not affected by steam from fresh-cooked targets.

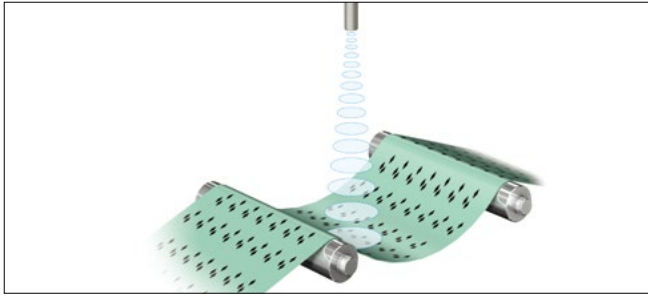

### Detecting slack in films


Reliable detection is ensured regardless of surface color, pattern, and luster. In addition, upper and lower limits can be output separately.



### Detecting the level of chocolate


Since the targets are food products, contact liquid level sensors cannot be used. In addition, detection with photoelectric sensors is adversely affected by the target color and luster. The FW Series ensures reliable detection regardless of target color and luster.

## Semiconductor/ Electronics/ Electrical Industry

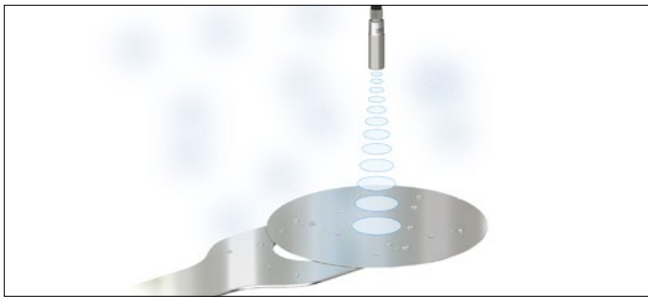


### Detecting wafers in the cleansing process

Reliable detection of sweating wafers is ensured even in a vaporous atmosphere immediately after the slicing process.

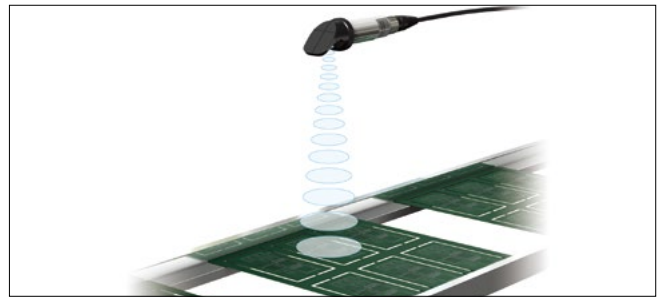


### Detecting slit substrates in the transfer process

Due to the colors and slits of the substrate, instability and chattering of outputs have been inevitable with conventional photoelectric sensors. The FW Series ensures reliable detection unaffected by colors and small slits.

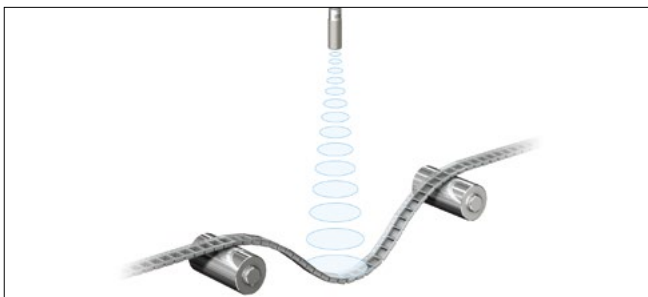


### Controlling web tension

Due to transparency and surface irregularities, detection with photoelectric sensors has been difficult. The FW Series ensures reliable detection unaffected by projections and depressions. In addition, the two outputs can be used for making outputs of upper and lower limits separately.

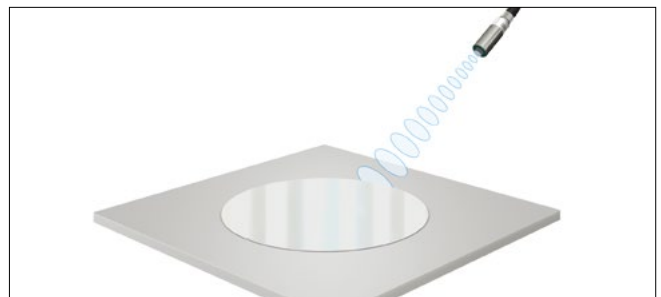

### Detecting wafers from an angle

Detection has been difficult because of the minute height difference between the thin wafer and background. The FW Series ensures reliable detection by applying ultrasonic waves from an angle to cause slight reflections from the edge.

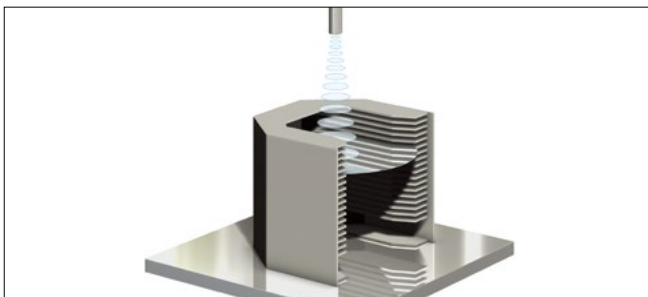

### Detecting wafers in a magazine rack

The FW Series is used to detect the remaining wafers. Detection with reflective-type sensors has been difficult because the light was absorbed by the surface film of the wafers. The FW Series is not affected by surface films or glossy backgrounds.



### Controlling the fluid level of a cleaning solution

The FW Series is used for controlling the liquid level. The two outputs can be used for making outputs of upper and lower limits separately. In addition, the special liquid level detection mode enables various controls with simple setup.

## Side viewer attachment FW-SV01

Enhances mounting flexibility by bending the ultrasonic waves.




## Applications



### Detecting baskets

Cage-type targets with an open structure can be detected reliably with the FW Series with a wide detection range.

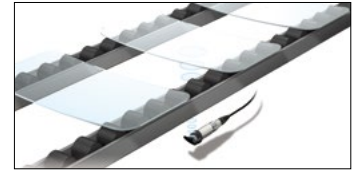

### Detecting the passage of plate glass

Detection is ensured unaffected by the curvature, color, and luster of the surface.

## Lineup

### Sensor head

| Model   | Shape | Detecting range (inch mm)      | Size (inch mm)                      |
|---------|-------|--------------------------------|-------------------------------------|
| FW-H02  |       | 1.97" to 7.87" 50 to 200 mm    | M18 x P1 P0.04", Length = 2.5" 63.5 |
| FW-H07  |       | 5.91" to 27.56" 150 to 700 mm  |                                     |
| FW-H10R |       | 5.91" to 39.37" 150 to 1000 mm | M18 x P1 P0.04", Length = 4.1" 104  |

### Digital amplifier


| Model   | Shape | Shape          | Type of output |
|---------|-------|----------------|----------------|
| FW-V20  |       | DIN mounting   | NPN            |
| FW-V20P |       |                | PNP            |
| FW-V25  |       | Panel mounting | NPN            |
| FW-V25P |       |                | PNP            |

### Options


|                                 |                                   |                                      |                                                       |                                                   |                                                                          |
|---------------------------------|-----------------------------------|--------------------------------------|-------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------|
| Side-view attachment<br>FW-SV01 | Light guide attachment<br>FW-LG01 | L-shaped cable connector<br>OP-51691 | Right-angled mounting bracket<br>(PPS made)<br>FW-B01 | Straight mounting bracket<br>(PPS made)<br>FW-B02 | Panel mounting bracket kit<br>OP-51476<br>(Accessory to the FW-V25/V25P) |
|---------------------------------|-----------------------------------|--------------------------------------|-------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------|

## Input/Output circuits

### FW-V20/FW-V25 NPN

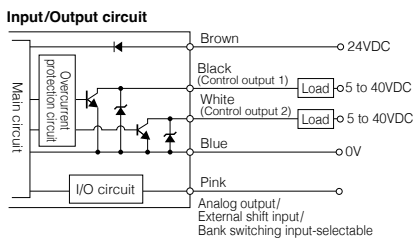

### FW-V20P/FW-V25P PNP

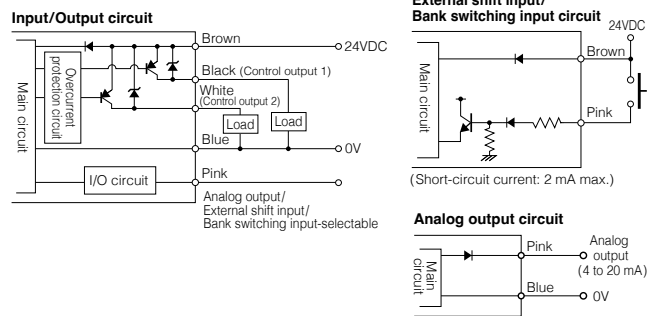

## Specifications

### Sensor head

|                                            | Standard type                                                                                                                                       |                             | Precision type                      |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|
| Model                                      | FW-H02                                                                                                                                              | FW-H07                      | FW-H10R                             |
| Detecting range <sup>1</sup> .             | 2.0" to 7.9" 50 to 200 mm                                                                                                                           | 5.9" to 27.6" 150 to 700 mm | 5.9" to 39.4" 150 to 1000 mm        |
| Response speed                             | 250 ms                                                                                                                                              | 300 ms                      | 1000 ms                             |
| Temperature characteristics <sup>2</sup> . | 0.25% of F.S./°C <sup>3</sup>                                                                                                                       |                             | 0.06% of F.S./°C                    |
| Indicator lamp                             | Operation indicator (orange) x1 (FW-H02/07: Turns on when the power is turned on. FW-H10R: Turns on when the target is within the detecting range.) |                             |                                     |
| Protective construction                    | IP67                                                                                                                                                |                             |                                     |
| Ambient temperature                        | -25 to +70°C (-13 to 158°F), No Freezing                                                                                                            |                             |                                     |
| Relative humidity                          | 35 to 85%, No condensation                                                                                                                          |                             |                                     |
| Resistance to vibrations                   | 10 to 55 Hz, Horizontal amplitude: 1.5 mm, 2 hours each in the X, Y, and Z axis                                                                     |                             |                                     |
| Dimensions                                 | M18 x P1 P0.04", Length = 2.5" 63.5                                                                                                                 |                             | M18 x P1 P0.04", Length = 4.09" 104 |
| Weight (Including a 6.6' 2-m head cable)   | Approx. 89 g                                                                                                                                        |                             | Approx. 106 g                       |
| Material                                   | Brass-nickel plating, PBT, Polyurethane, Polyamide resin                                                                                            |                             |                                     |
| Accessories                                | M18 nut: 2, Head cable: 6.6' 2 m                                                                                                                    |                             |                                     |

1. Dead zones of approx. 2% of F.S. exist at both ends of the detecting range.

2. The errors for the indicated value at 25°C (77°F).

3. The variation of sonic velocity in air generates errors in the negative direction at 25°C (77°F) and above, or in the positive direction at 25°C (77°F) and below.

## Digital amplifier

| Model                                     | NPN                                                                                                                                                                                                                     | FW-V20/FW-V25                    |                               |                                                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------|-----------------------------------------------------------------|
|                                           | PNP                                                                                                                                                                                                                     | FW-V20P/FW-V25P                  |                               |                                                                 |
| Power-supply voltage                      | 24 VDC, Ripple (P-P): 10% max.                                                                                                                                                                                          |                                  |                               |                                                                 |
| Current consumption                       |                                                                                                                                                                                                                         |                                  |                               | * Excluding the analog output<br>Including the sensor head unit |
|                                           |                                                                                                                                                                                                                         | When connected to the FW-H02/H07 | When connected to the FW-H10R |                                                                 |
|                                           | Normal mode                                                                                                                                                                                                             | 1680 mW (70 mA) max.             | 2640 mW (110 mA) max.         |                                                                 |
| ECO mode                                  | 1370 mW (57 mA) max.                                                                                                                                                                                                    | 2330 mW (97 mA) max.             |                               |                                                                 |
| Display format [inch/mm selectable]       | 2-row display with signed 3-digit, 7-segment LED (Character height: Upper row: 0.32" 8 mm, red; Lower row: 0.22" 5.7 mm, green)<br>Refresh rate: 10 times/sec. (5 times/sec. when using the display averaging function) |                                  |                               |                                                                 |
| Operation indicator                       | Red LED x 2 (corresponding to Control output 1 and Control output 2) Green LED x 2 (Display CH indicator)                                                                                                               |                                  |                               |                                                                 |
| Chattering prevention function            | Selectable from OFF, 0.5, 1, 2, 5, and 10s (Selectable from OFF, 1, 2, 5, and 10s when connected to the FW-H10R)                                                                                                        |                                  |                               |                                                                 |
| Bank/external shift input                 | Input time: 25 ms min. (This input/analog output is selectable.)                                                                                                                                                        |                                  |                               |                                                                 |
| Control output                            | NPN (PNP) open collector, 100 mA 40 V max. (30 V max. for PNP)<br>Residual voltage: 1 V max., 2 outputs (N.O./N.C. switch-selectable)                                                                                   |                                  |                               |                                                                 |
| Protective circuit                        | Reverse connection protection, over-current protection, surge absorber                                                                                                                                                  |                                  |                               |                                                                 |
| Analog output                             | 4 to 20 mA, maximum load resistance: 260 Ω (Bank/external shift input/analog output selectable)                                                                                                                         |                                  |                               |                                                                 |
| Ambient temperature                       | -10 to +55°C (14 to 131°F), No Freezing                                                                                                                                                                                 |                                  |                               |                                                                 |
| Relative humidity                         | 35 to 85%, No condensation                                                                                                                                                                                              |                                  |                               |                                                                 |
| Resistance to vibrations                  | 10 to 55 Hz, Horizontal amplitude: 1.5 mm, 2 hours each in the X, Y, and Z axis                                                                                                                                         |                                  |                               |                                                                 |
| Housing material                          | Main unit and cover: Polycarbonate, Keycaps: elastomer                                                                                                                                                                  |                                  |                               |                                                                 |
| Weight (Including a 6.6' 2-m power cable) | Approx. 85 g                                                                                                                                                                                                            |                                  |                               |                                                                 |
| Accessories                               | FW-V20 (P): Mounting bracket, power cable, and instruction manual<br>FW-V25(P): Panel mounting bracket, front protective cover, power cable, and instruction manual                                                     |                                  |                               |                                                                 |

## Specifications of options

### Side-view attachment FW-SV01

| Sensor head model combination | FW-H02                                                                                | FW-H07                         | FW-H10R                        |
|-------------------------------|---------------------------------------------------------------------------------------|--------------------------------|--------------------------------|
| Detecting range 1.            | 2.0" to 7.1"<br>50 to 180 mm                                                          | 5.9" to 24.8"<br>150 to 630 mm | 5.9" to 35.4"<br>150 to 900 mm |
| Ambient temperature           | -25 to +70°C (-13 to 158°F), No Freezing                                              |                                |                                |
| Relative humidity             | 35 to 85%, No condensation                                                            |                                |                                |
| Resistance to vibrations      | 10 to 55 Hz, Horizontal amplitude: 0.06" 1.5 mm, 2 hours each in the X, Y, and Z axis |                                |                                |
| Weight                        | Approx. 15 g                                                                          |                                |                                |
| Material                      | PPS                                                                                   |                                |                                |
| Accessories                   | M18 nut:1, Wave washer:1                                                              |                                |                                |

1. Indicates the distance from the detecting reference (zero point).  
Refer to the dimensions below for the detecting reference.

### Light guide attachment FW-LG01

| Model                    | FW-LG01                                                                                      |
|--------------------------|----------------------------------------------------------------------------------------------|
| Power-supply voltage     | 6 VDC (button battery LR43 x 4)                                                              |
| Light source             | Blue LED (wave length: 470 nm)                                                               |
| Ambient temperature      | 0 to 45°C (32 to 113°F), No Freezing                                                         |
| Resistance to vibrations | 10 to 55 Hz, Horizontal amplitude: 0.06" 1.5 mm, 2 hours each in the X, Y, and Z axis        |
| Housing material         | Main unit: ABS; Keycap: Silicon rubber                                                       |
| Weight                   | Approx. 21 g (Including batteries)                                                           |
| Accessories              | Test button batteries (LR43): 4, instruction manual<br>* Batteries are loaded to the casing. |

\* It is recommended that the product be used with a maximum detecting distance of 19.69" 500 mm due to the visibility and consistency of the spot and the detecting distance.


### L-shaped relay connector OP-51691

| Model                    | OP-51691                                                                       |
|--------------------------|--------------------------------------------------------------------------------|
| Ambient temperature      | -25 to +70°C (-13 to 158°F), No Freezing<br>10 to 55 Hz, Horizontal amplitude: |
| Resistance to vibrations | 0.06" 1.5 mm, 2 hours each in the X, Y, and Z axis                             |
| Weight                   | Approx. 70 g                                                                   |


## Dimensions

Unit: inch mm

### Sensor head FW-H02/FW-H07

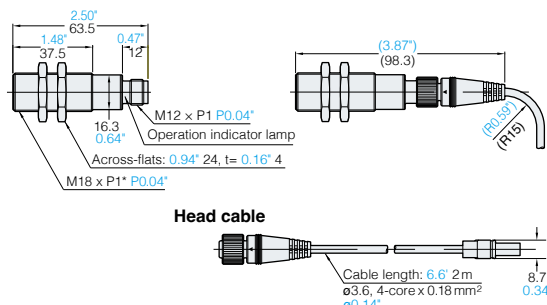


### Sensor head FW-H10R

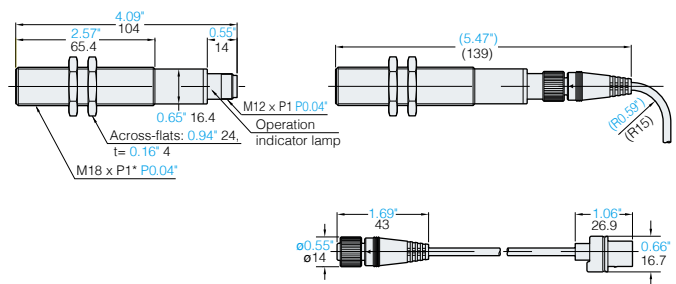


\* Compatible female screw: Min. internal diameter 17.1 0.68"


### Digital amplifier FW-V20/V20P

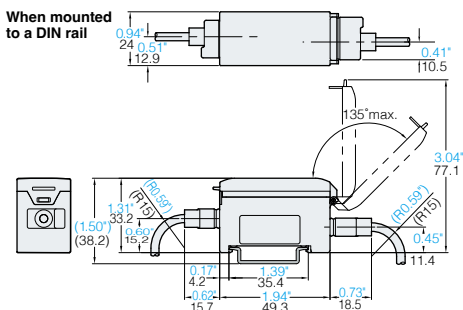


### When attaching a bracket (standard)




### Mounting bracket SPCC




### Digital amplifier FW-V25/V25P

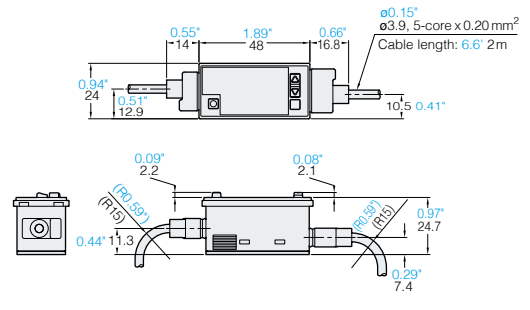


### Panel-mounting bracket kit OP-51476




When mounted to a panel:




### Panel cutout




### Power cable




### Front protective cover




### Right-angled mounting bracket FW-B01




### Straight mounting bracket FW-B02




### Side-view attachment FW-SV01




### Light guide attachment FW-LG01

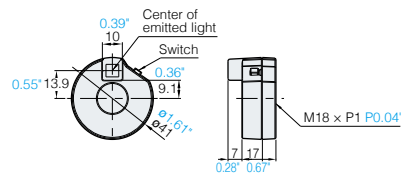


### L-shaped cable connector OP-51691

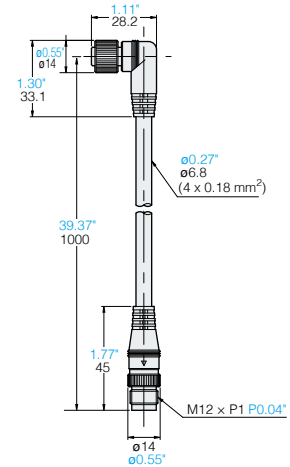


### FW-H02/H07 with FW-SV01




### FW-H02/H07 with FW-LG01




### FW-H02/H07 with OP-51691




### FW-H10R with FW-SV01

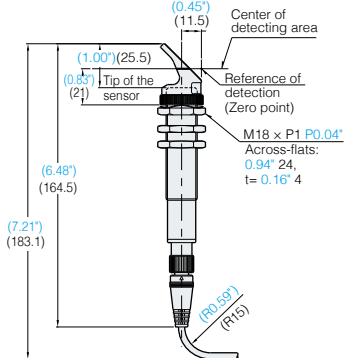




### FW-H10R with FW-LG01



### FW-H10R with OP-51691




### Display resolution-distance characteristics (Typical)

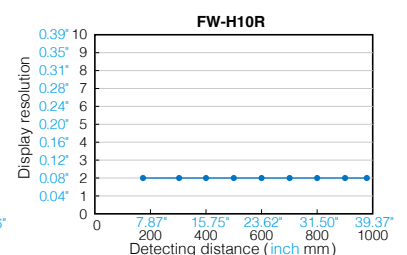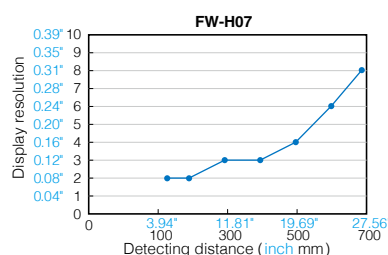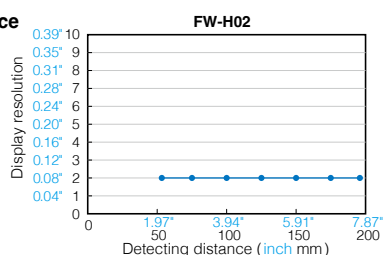

## Digital Laser Optic Sensors LV Series

### High-Power Digital Laser Optic Sensor

Laser technology achieves new sensing standards that are impossible with conventional sensors.

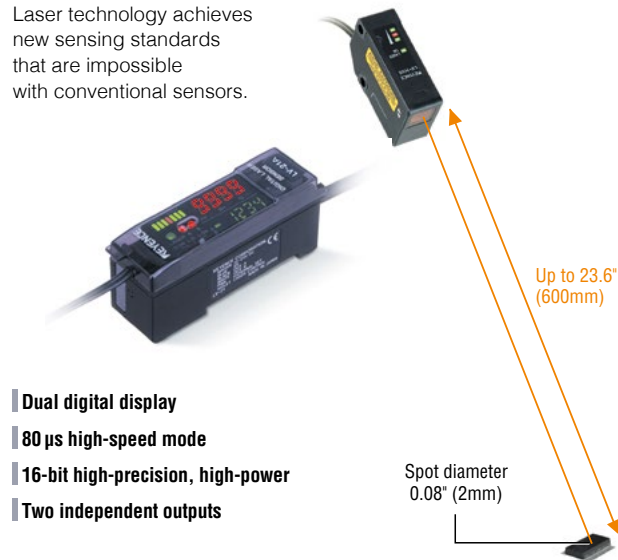

- Dual digital display
- 80 μs high-speed mode
- 16-bit high-precision, high-power
- Two independent outputs


Various visible beam spots cover a wide range of applications

#### Wide area thru-beam

##### LV-H100 (10 mm spot)

When the 0.39" (10 mm) type is used


1000



##### LV-H300 (30 mm spot)


When the 1.18" (30 mm) type is used

3000



#### Straight beam, retro-reflective

##### LV-H62



Up to 23' (1m)

#### Long-distance, adjustable spot

##### LV-H32



Up to 39' (1000mm)

#### Long-distance, area detection

##### LV-H42



1.46" (48mm) width

#### Area detection, definite-reflective

##### LV-H47



2.2" to 3.3" (55 to 85mm) range

## RGB Digital Fiberoptic Sensors CZ-V Series

### The Smartest RGB Sensor in the Industry



Dual Digital display, amplifier  
CZ-V21A(P)/V22A(P)

- Hybrid SUPER RGB sensor
- **First-in-its-class** Triple 16-bit calculation for accurate recognition
- Automatic selection from 7 different light combinations
- Four independent outputs

SUPER RGB sensor expand the range of applications

#### Small beam spot type unaffected by luster

##### CZ-H37S

Small beam spot of 0.04" (1-mm) diameter at an operating distance of 0.63" (16 mm)



#### Luster-cancel long-distance

##### CZ-H35S



#### Fluorescence detection UV sensor not affected by patterns or colors

##### CZ-H52


Emits UV light to detect fluorescent materials and marks.



UV light application  
Detecting fluorescent materials and marks

#### Beam spot adjustable

##### CZ-H32



Beam spot adjustable in 3 sizes  
Versatile detection from a long distance

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

### KEYENCE CORPORATION OF AMERICA

500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A.

### KEYENCE CANADA INC.

6775 Financial Dr., Suite 400, Mississauga, ON. L5N 0A4, Canada

### KEYENCE MÉXICO S.A. DE C.V.

Av. Paseo de la Reforma 243, P11, Col. Cuauhtémoc, C.P. 06500, Del. Cuauhtémoc, Ciudad de México, México

+1-201-930-0100 keyence@keyence.com

+1-905-366-7655 keyencecanada@keyence.com

+52-55-8850-0100 keyencemexico@keyence.com

CALL TOLL FREE

1-888-KEYENCE

TO CONTACT YOUR LOCAL OFFICE

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.  
Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies.  
The specifications are expressed in metric units. The English units have been converted from the original metric units. Unauthorized reproduction of this catalog is strictly prohibited.  
Copyright © 2005 KEYENCE CORPORATION. All rights reserved.

03KA-2024-2

FW-KA-C-US 2025-10 611006